

This procedure for “*Remote Button Replacement for Land Rover Discovery 3, Range Rover Sport*” was prepared by Polmex – Western Australian supplier of Silicone Button Replacements for remote key controls of various car makes and models.

For Orders please visit us on line at [www.polmex.com.au](http://www.polmex.com.au)

Please follow step by step replacement procedure for removing old worn pad of Land Rover Discovery 3/ Range Rover remote key as below:



- ❑ Pre warm top apart of remote key (consisting 3 push buttons) with hand held hair drier.

It will make plastic more pliable and easier to remove




with flat screwdriver start lifting corners of the pad in shaving motion from both sides and ends of the cover.



Start lifting corners of the pad, using screwdriver. Do not insert screwdriver inside the shell as you may damage electronic switches.



Lift up both ends of the top cover one after another and then slowly pull it of

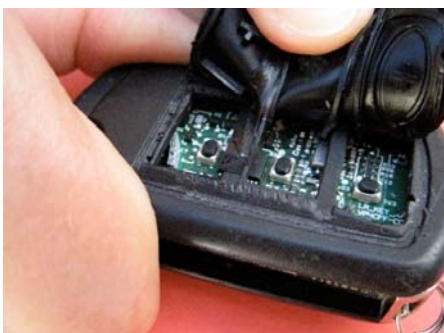

Middle part of the top cover needs to be pulled last so no rubber is left on the top of the shell.



After removing top cover, your remote should look like on the picture above, with all electronic switches exposed



Prepare new Silicone Replacement Pad and wooden skewer for pressing new pad in. Do not use any sharp tools as you may damage pad or electronics.



Start installing new pad by pushing one end of it under cut out of plastic shell, till it stays in place



With help of wooden skewer, gently push new cover in till first catchers engage with plastic cover



Continue pressing in with finger and help of skewer, till first section sits in cut out of plastic cover properly



Continue the same process till middle section of the replacement pad engages with plastic cover.



Continue the same process till last section of the new replacement pad engages with plastic cover.



Your repaired remote key with new Silicone Replacement Pad should look like the one on the picture above